

WP-800 Line Thermal Printer


Station thermal printer Features:

Smallest size among others.
 High-speed printing.
 The resident data buffer has storage capacity of 8K bytes.
 Esc/pos command compatible.
 Provides variety of interface.
 Paper end and near end sensor, head up sensor.
 Repeat previous Button(option)
Two Drawer Kick Out.
 Barcode and Bitmap printing capability



General Specifications:

Power supply	DC24V		Fast feed speed	150 mm/second	
Printer method	Thermal line		Paper width	83 mm	
SRAM	128K		Weight	1.8 kg	
Flash	512 KB		MTBF	50 x 10 ⁶ million lines Changing Rate of Average head resistance:+/- 15% or less	
Print Speed	150 mm/s		Detect Sensor	Paper end and near end sensor.	
Character structure	Alphanumeric	95	Interface	Optional RS-232C, Centronics, RS-485, USB, 10 Base-T	
	International	37 128 x 8 Graphic		Environmental condition:	
Number of columns	56/42 columns			Temperature	Humidity
External dimensions (W) x (D) x (H)	140.7x 190 x 137 mm		Operating	5~ 40	30% ~ 85%
			Storage	-20 ~ 60	10% ~ 90%

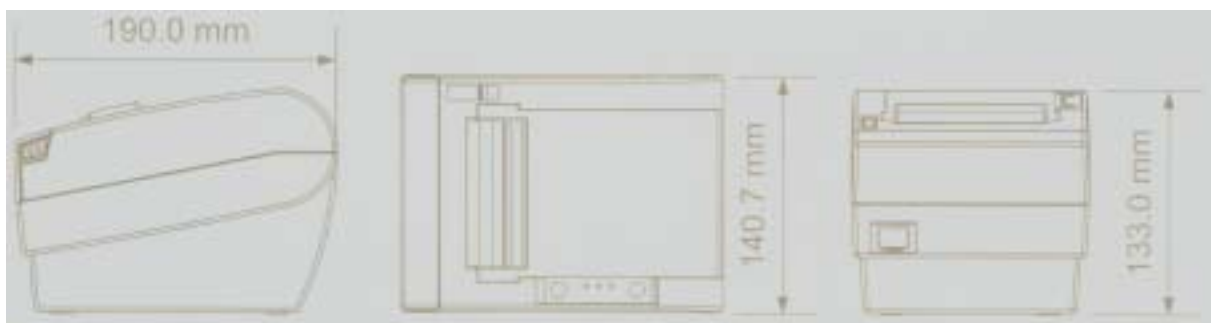

Winpos System Co., Ltd.

4F, No.5, Alley 6, Lane 45, Bao Shin RD., Shin Tien, Taipei, Taiwan
 TEL:886-2-86657955 FAX:886-2-86659446
<http://www.winpos.com.tw> E-mail:sales@winpos.com.tw